


23-28


TRACTOR-TOWED SCRAPER

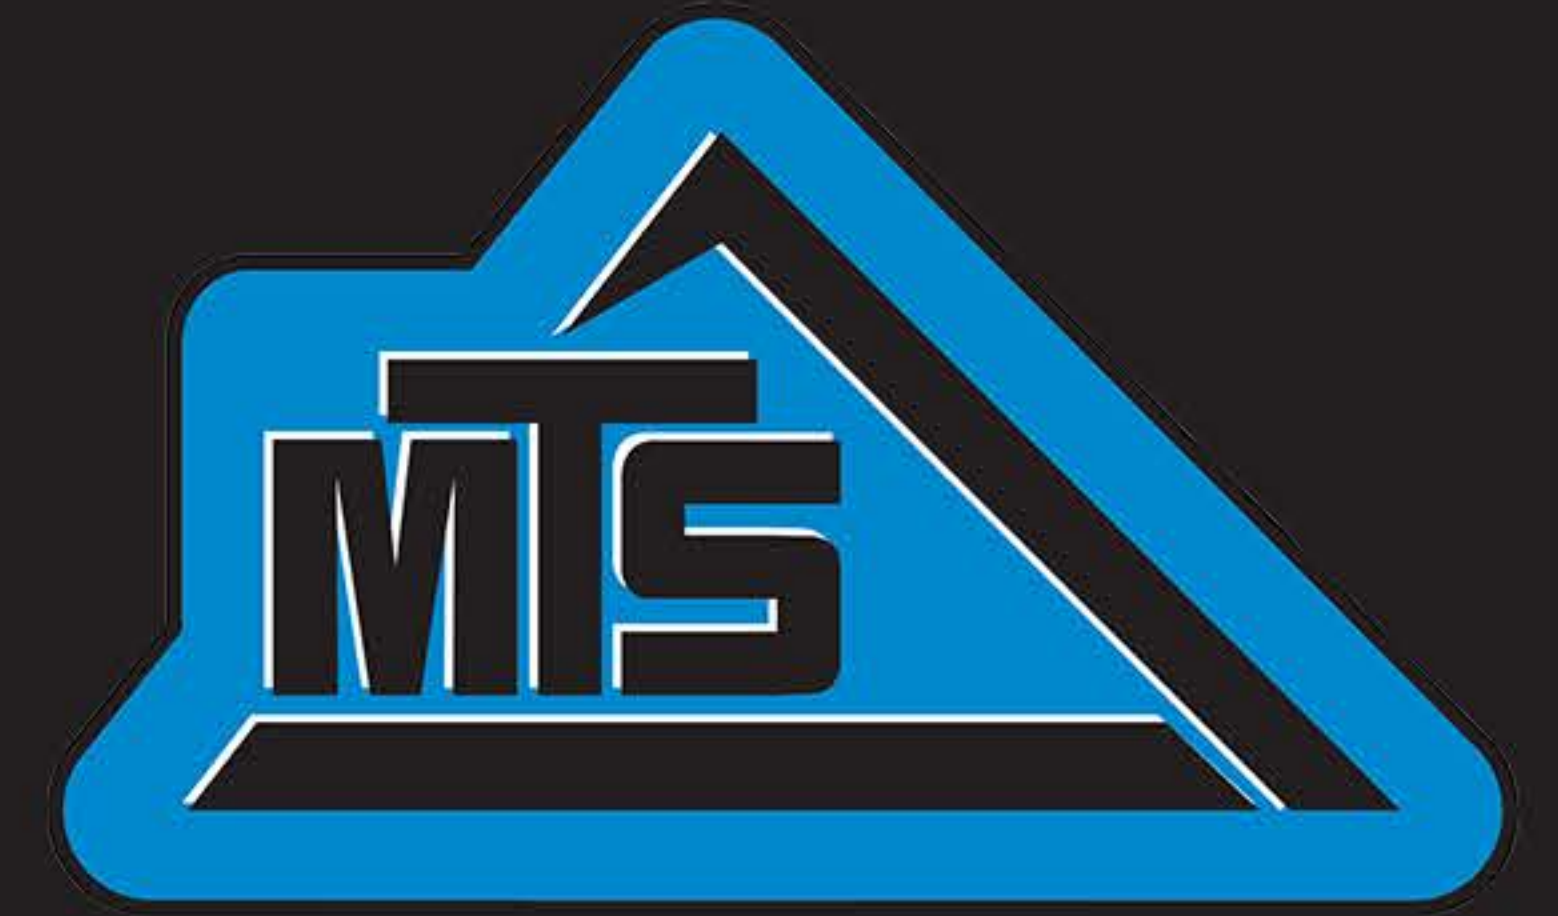

MOBILE TRACK SOLUTIONS

TRACK FORWARD ▶▶▶▶

Our People. Our Products. Our Passion.

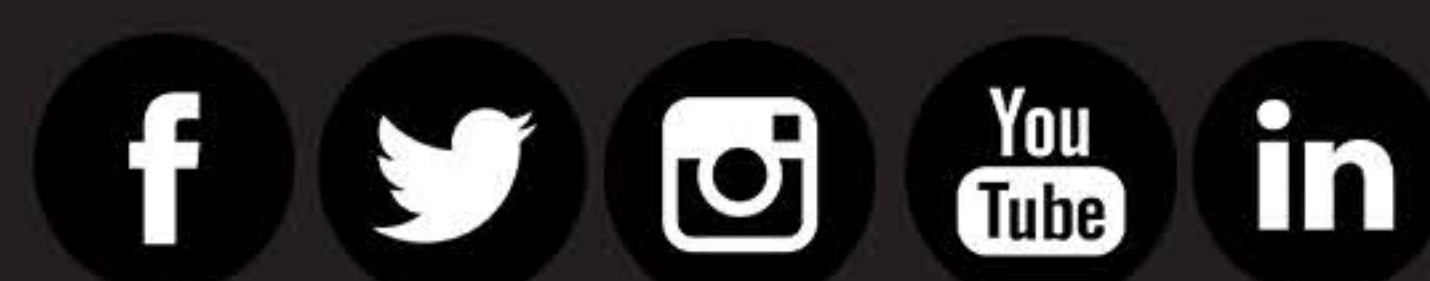

mobiletracksolutions.com

23-28 SPECIFICATIONS



SCRAPER BOWL

ISO Capacity	23.7 yd ³	18.1 m ³
ISO Capacity - Sideracks	26.4 yd ³	20.2 m ³
ISO Capacity - Sideracks & Apron SG	28.2 yd ³	21.6 m ³
Width of Cut, To Router Bits	135.5 in	3,441 mm
Capacity Struck	12.6 yd ³	9.6 m ³
Max Depth of Cut	6.75 in	171 mm
Ground Clearance @ CE	25.5 in	648 mm
Apron Opening	69 in	1,753 mm

DIMENSIONS

Width (Inside of Bowl)	132 in	3,353 mm
1 Width (Outside Rear Tires)	131 in	3,327 mm
2 Width (Outside Bowl)	144 in	3,658 mm
Height (Floor to top of Ejector)	103 in	2,616 mm
Height (Sidewall)	36 in	914 mm
Length (Floor)	72 in	1,829 mm
5 Push Block to Axle	76 in	1,930 mm
6 Axle to Cutting Edge	140 in	3,556 mm
7 Cutting Edge to Hitch	234 in	5,943 mm
Maximum Load Rating	70,000 lbs	32,000 kg

SHIPPING MODIFICATIONS

3 Height (Overall Shipping)	119 in	3,023 mm
2 Width (Overall Shipping)	144 in	3,658 mm
4 Length (Overall Shipping)	450 in	11,430 mm
Empty Weight	30,217 lbs	13,706 kg

WEIGHT DISTRIBUTION

Distribution Empty (Tongue)	26%
Distribution Empty (Axle)	74%
Distribution Loaded (Tongue)	27%
Distribution Loaded (Axle)	73%

BRAKES & TIRES

Brake Type	Dry Disk	
Caliper Quantity	2	
Operating Pressure of Brakes	500psi	3,447 kPa
Tire Quantity	4	
Standard Tires	23.5R25	

HYDRAULICS

Bowl Cylinder Bore	7 in	178 mm
Bowl Cylinder Stroke	17 in	432 mm
Apron Cylinder Bore	4.5 in	114 mm
Apron Cylinder Stroke	25.1 in	638 mm
Ejector Cylinder Bore	6 in	152 mm
Ejector Cylinder Stroke	76 in	1,930 mm

